

EXODUS™ *PRIME*

ONE BOX SOLUTION
MAINTAINED LED EXIT LIGHT

This low maintenance, wall or ceiling mountable one box solution Exit Sign comes complete with all variations of the Running Man pictogram and offers many years of reliable, succinct and efficient Exit Lighting.

Its no-frills slide and connect style installation mechanism and robust design allows it to be used in a wide variety of indoor applications, ranging from offices through to retail stores, cafes, schools and public spaces in the quickest time possible.




Project Name	Type	Qty
Comments		

Technical Specifications

Item	Part Number	EXS-PRIME
	Description	LED Slide and Connect 24m Exit Light c/w <i>Synthium</i> ™ Battery
Input	Voltage & Frequency	230VAC ; 50Hz
	Installation	Large terminal block and 20mm ² cable entry
Output	Light Source	High efficacy LED strip, 100,000 hours
	Mode of Operation	Maintained
	Power Consumption	2W (standby)
	Emergency Duration	> 120 minutes
Controls	Charger	Intelligent 3-stage charger with <i>Synthium</i> ™ battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Diffuser	All variations of Running Man pictogram
	Construction	Flame-retardant polycarbonate
	Mounting	Surface mounted - wall or ceiling (single or double side application)
	Dimensions L x W x H	360mm x 60mm x 215mm
	IP Rating	IP20
	Weight	1.2kg
Environment	Operating Temperature	1° to 40°C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	AS/NZS 2293 Classification	C0 D3.2 C90 D2.5
Accessories	Replacement Battery	P/N: BAT-PRIME: <i>Synthium</i> ™ LiFePO ₄

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

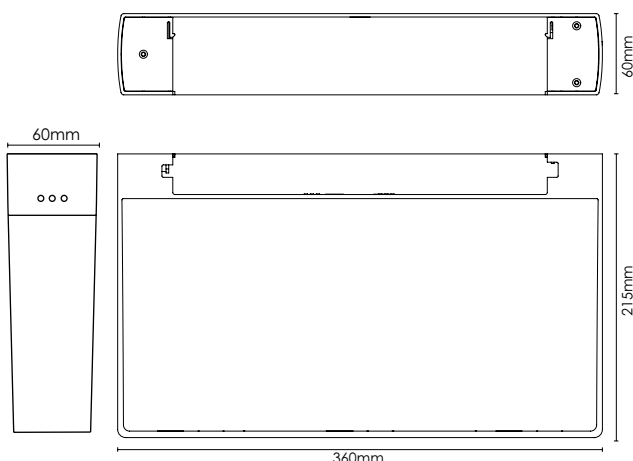

AS/NZS 2293.1:2018 Spacing Table

This product performs the dual role as an 24m Exit Sign and an Emergency luminaire with the following NATA-accredited emergency classifications:

SPACING TABLE		MOUNTING HEIGHT (m)			
NATA Classification		2.1	2.4	2.7	3.0*
EXS-PRIME	C0 - D3.2	6.5	6.5	6.5	6.5
	C90 - D2.5	5.8	5.8	5.7	5.6

* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1 2018

THANKS
FOR THE
love

MB Lights
info@mblights.com.au

[[click here](#) for product enquiry]