

# EXODUS™ PENDANT

**ONE BOX SOLUTION - SUSPENDED  
 MAINTAINED LED BLADE EXIT LIGHT**

The Exodus™ Pendant presents a dedicated suspended Exit Light in a sleek and upmarket physical appearance that exudes elegance to complement architectural and premium interior spaces.

Its slide and connect mounting bracket and retractable 2m suspension wire provides ease of installation while its stylish Running Man pictogram positions this product towards modern internal spaces with high customer-visibility such as apartments, hospitals, offices, bars, council buildings and retail outlets.

- 
- 
- 
- 
- 
- 
- 
- 



Available as:

- 
- 
- 
- 



Project Name	Type	Qty
Comments		

## Technical Specifications

<b>Item</b>	<b>Part Number</b>	<b>EXS-PENDANT</b>
	<b>Description</b>	LED One Box Solution Suspended Mounted Edge-Lit Exit Light c/w <i>Synthium™</i> Battery
<b>Input</b>	<b>Voltage &amp; Frequency</b>	230VAC ; 50Hz
	<b>Installation</b>	Large terminal block and 20mm <sup>2</sup> cable entry
<b>Output</b>	<b>Light Source</b>	High performance LED bar, 100,000 hours
	<b>Mode of Operation</b>	Maintained
	<b>Power Consumption</b>	2W (standby)
	<b>Emergency Duration</b>	> 120 minutes
<b>Controls</b>	<b>Charger</b>	Intelligent 3-stage charger with <i>Synthium™</i> battery management system
	<b>Protection</b>	Overcharge, low voltage disconnect, overcurrent, short circuit
	<b>Testing Facility</b>	Manual test switch
	<b>Indicators</b>	Battery charger green LED
<b>Physical</b>	<b>Diffuser</b>	All variations of Running Man pictogram
	<b>Construction</b>	Flame-retardant polycarbonate
	<b>Mounting</b>	Ceiling surface mounted bracket with 2m suspension wire kit
	<b>Dimensions L x W x H</b>	350mm x 70mm x 210mm
	<b>IP Rating</b>	IP20
	<b>Weight</b>	1.5kg
<b>Environment</b>	<b>Operating Temperature</b>	1° to 40°C
	<b>Relative Humidity</b>	0 to 95%
<b>Compliance</b>	<b>Standards</b>	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	<b>AS/NZS 2293 Classification</b>	C0 D6.3 C90 D3.2
<b>Accessories</b>	<b>STAR™ Self-Test and Reporting</b>	P/N: EXS-PENDANT/ST
	<b>DALI-compatible</b>	P/N: EXS-PENDANT/DL
	<b>SYNECTIX™ RF Wireless</b>	P/N: EXS-PENDANT/RF
	<b>Replacement Battery</b>	P/N: BAT-BLADE: <i>Synthium™</i> LiFePO <sub>4</sub>

**NOTE:** Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

## Dimensions

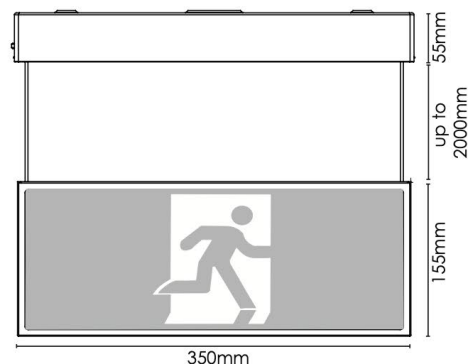

## Spacing Table

This product performs the dual role as an 24m Exit Sign and an Emergency luminaire with the following NATA-accredited emergency classifications:

SPACING TABLE	MOUNTING HEIGHT (m)			
NATA Classification	2.1	2.4	2.7	3.0*
C0 - D6.3	8.5	8.8	8.9	9.1
C90 - D3.2	6.5	6.5	6.5	6.5

\* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1 2018.

## Distributed By:

**MB Lights**  
info@mblights.com.au  
[ [click here for product enquiry](#) ]